

NO OPTIONS NEEDED!

Fully IBM PC Compatible

Modem

- ▶ Bell 103/202 CCITT V.21/V.23
- ▶ 300/600/1200 Baud
- ▶ Auto-dial, auto-answer, direct connect

Printer

- ▶ 40 column thermal
- ▶ Screen dump for graphics or 80 column text

Video Output

- ▶ IBM PC color graphics compatible
- ▶ RGB and composite video outputs
- ▶ Expanded 132 column text mode
- ▶ Expanded 640 x 400 pixel monochrome graphics mode

Intel 80186 CPU

- ▶ 8086/8088 software compatible
- ▶ 8 MHz clock

LCD Flat Screen

- ▶ 16 lines by 80 characters
- ▶ 512 x 128 pixel graphics
- ▶ Electroluminescent backlight

2x1 Mbyte Floppy

- ▶ 2 Megabytes system capacity
- ▶ 2 independent drives
- ▶ Reads IBM PC diskettes

Interfaces

- ▶ 1 parallel printer port
- ▶ 2 RS232C serial I/O ports
- ▶ SCSI compatible hard disk interface
- ▶ IBM PC I/O Bus expansion connector

Hands-Free Phone

- ▶ Adjustable volume, muting
- ▶ Repertory dialing
- ▶ Automatic redial


Sculptured Low Profile Keyboard

- ▶ 83 keys with numeric keypad and 10 function keys

Bundled Software

- ▶ MS-DOS version 2
- ▶ System Utilities
- ▶ Microsoft GWBASIC
- ▶ Word processor
- ▶ Spreadsheet
- ▶ Filer/Data Base

* Charlie: Optional

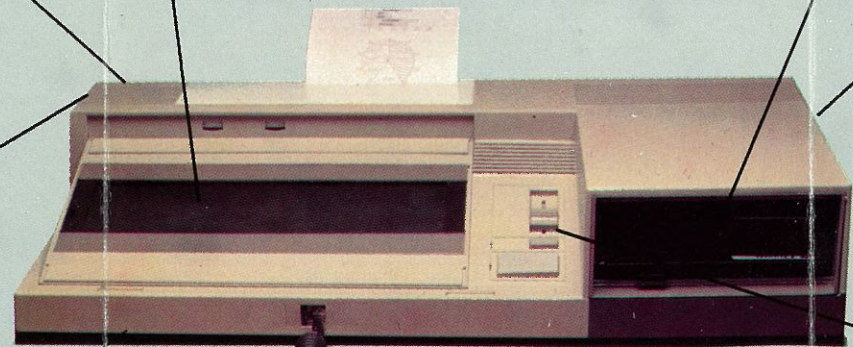


Fully IBM PC Compatible Computer with bundled software in a
17 lb. briefcase size package



Truly Portable

The keyboard stores inside the display cover, allowing the system to be carried in its own soft-sided carrying case.

The STM PC goes anywhere a briefcase goes. Take it home in the evening, to meetings, on business trips. **Everything you need is in one convenient package!**

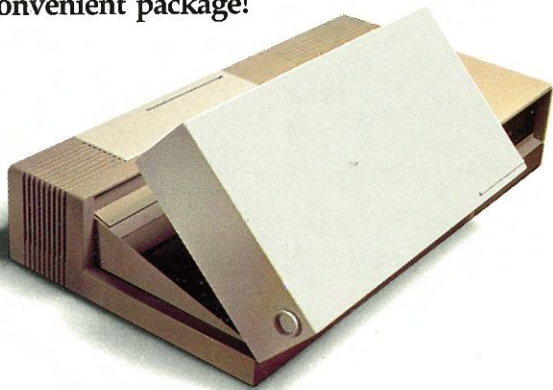

Specifications

Processor:	Intel 80186 (8086/8088 compatible) 8 MHz clock
Memory:	256 Kbyte dynamic read/write (RAM) expandable to 512 Kbyte
I/O Ports:	one parallel output printer port (Centronics compatible) two serial synchronous/asynchronous RS232C I/O ports with full handshaking and programmable baud rate hard disk interface compatible with the Small Computer System Interface (SCSI) standard
Modem:	IBM PC I/O bus expansion connector auto-dial, auto-answer direct connect modem meets Bell 103/202, CCITT V.21/V.23 specifications modem communications software
Hands-Free Telephone:	adjustable volume, muting repertory dialing
Keyboard:	full-size, detachable, sculptured, low-profile 83 key typewriter layout with numeric keypad and 10 function keys
Video Display:	25 lines by 80 or 132 characters in alpha-numeric mode (software selectable) up to 320 by 200 pixel resolution in color graphics mode supports IBM PC low and medium resolution B&W graphics 640 by 400 pixel resolution in monochrome graphics mode also supports IBM PC high resolution monochrome text mode
LCD	16 lines by 80 characters in alpha-numeric mode upper/lower case with true descenders 512 by 128 pixel resolution in graphics mode electroluminescent backlight panel provides color background illumination
Printer:	built-in 40 column thermal printer screen-dump capability for graphics or 80 column text
Disk Drives:	two independent disk drives double-sided, double-density, 96 TPI capacity of each - 1 Mbyte unformatted 800 Kbyte formatted total system capacity of 2 Mbyte
Size:	20.3 in. x 10.8 in. x 4 in. 515 cm. x 275 cm. x 100 cm.
Weight:	under 17 pounds (8 Kgm)

IBM is a registered trademark of International Business Machines Corporation
MS-DOS and GW BASIC are registered trademarks of Microsoft Corporation

STM

535 Middlefield Road, Suite 250,
Menlo Park, California, USA 94025
Telephone: (415) 326-6226 Telex: 171627

